




Example - Model # AS2448-500-240

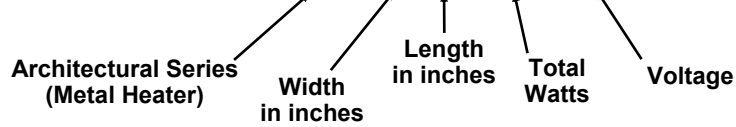

Architectural Series Metal Heaters are a two-piece frame consisting of a back tray with recessed junction box and (2) 1/2" Knockouts and a front panel both fabricated from 22 Ga. galvanized satin coat steel crimped together for greater strength and rigidity. A high-quality alloy resistance wire heating element electrically insulated with polytetrafluoroethylene (PTFE) compound rated at 482°F / 250°C is uniformly arranged over the entire back of front panel. A reflective membrane and 2" inches of four-pound density high temperature mineral wool insulation is installed on the top of the heating element. Design watt density range is 65-95 watts/ft² at rated voltage. Front panel is finished with a white high temperature baked-on powder coat.

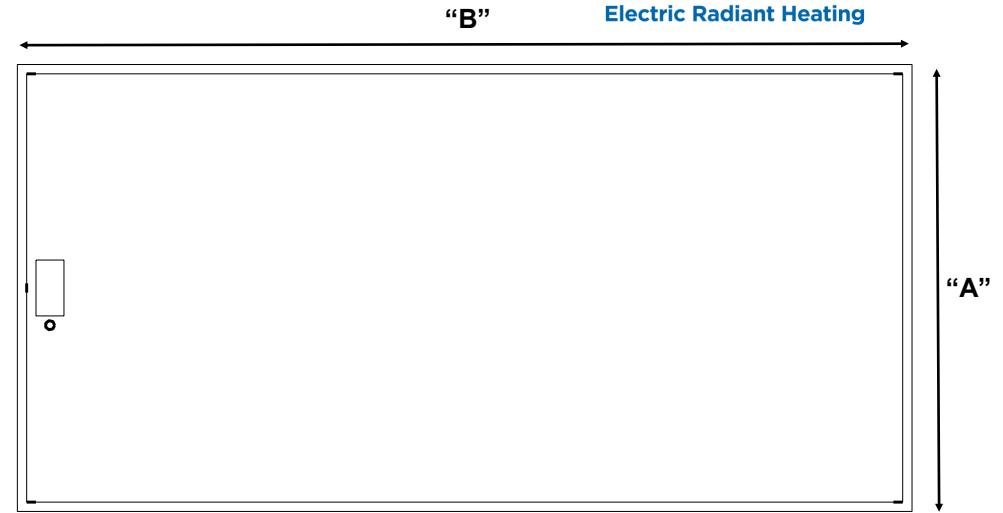

Model #	Watts	Voltage	"A" Width Inches	"B" Length Inches
AS2424-250-120	250	120	24"	24"
AS2424-310-120	310	120	24"	24"
AS2424-335-120	335	120	24"	24"
AS2424-375-120	375	120	24"	24"
AS2424-310-208	310	208	24"	24"
AS2424-355-208	355	208	24"	24"
AS2424-375-208	375	208	24"	24"
AS2424-250-240	250	240	24"	24"
AS2424-310-240	310	240	24"	24"
AS2424-325-240	250	240	24"	24"
AS2424-250-277	250	277	24"	24"
AS2424-310-277	310	277	24"	24"
AS2424-335-277	335	277	24"	24"
AS2424-375-277	375	277	24"	24"
AS2448-500-120	500	120	24"	48"
AS2448-625-120	625	120	24"	48"
AS2448-750-120	750	120	24"	48"
AS2448-535-208	535	208	24"	48"
AS2448-625-208	625	208	24"	48"
AS2448-750-208	750	208	24"	48"
AS2448-500-240	500	240	24"	48"
AS2448-625-240	625	240	24"	48"
AS2448-725-240	725	240	24"	48"
AS2448-500-277	500	277	24"	48"
AS2448-660-277	660	277	24"	48"
AS2448-750-277	750	277	24"	48"

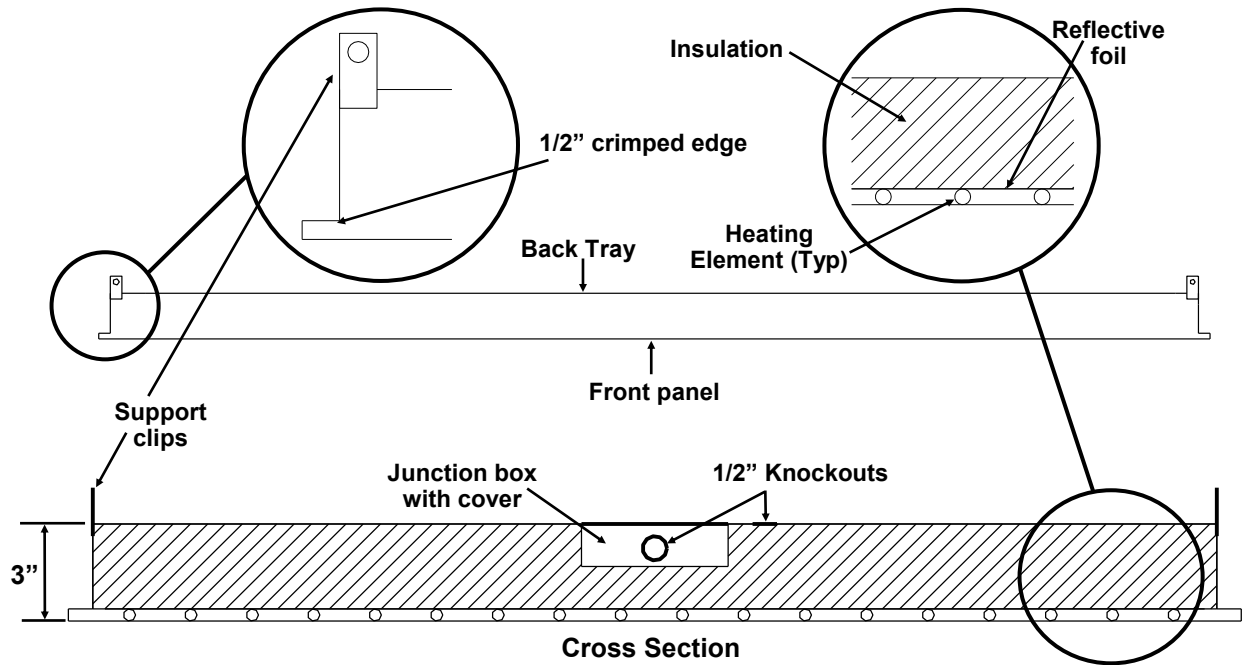

* Surface & Flush Mount Kits & Custom Colors Available
 * 14" x 48" & 14" x 60" Sizes Available

Architectural Series Metal Heaters (Ceiling Application)

(Installed in ceiling grid systems, surface and flush mount or hanging)

ThermaRay, Inc.
 670 Wilsey Road - #6
 Fredericton, NB E3B 7K4
 Canada
 (800) 506-7973
 (506) 457-4699 - Fax

